

Prep4sureGuide

WELCOME USE TEST ENGINE

Prepare your actual test with our sure pass exam guide for successful result

Input your exam code ...

Our sure prep material equipped with the highest experts team and the most authoritative exam items plus the best service, which can ensure you 100% pass. Besides, our exam training guide can support both the fastest delivery speed and the shortest time to get all knowledge.



Quality and Value

Prep4sureGuide Practice Exams are written to the highest standards of technical accuracy, using only certified subject matter experts and published authors for development - no all dumps.



Tested and Approved

We are committed to the process of vendor and third party approvals. We believe professionals and executives alike deserve the confidence of quality coverage these authorizations provide.



Easy to Pass

If you prepare for the exams using our Prep4sureGuide testing engine, It is easy to succeed for all certifications in the first attempt. You don't have to deal with all dumps or any free torrent / rapidshare all stuff.



Try Before Buy

Prep4sureGuide offers free demo of each product. You can check out the interface, question quality and usability of our practice exams before you decide to buy.



HAPPY CUSTOMERS

32694



DOWNLOADS

62152



TEAM MEMBERS

32694



SHARES

56692

<http://www.prep4sureguide.com>

Prepare your actual test with our sure pass exam guide for successful result


Exam : 642-780

Title : Maintaining Cisco Service Provider
VPNs and MPLS Networks
(MSPVM)

Vendors : Cisco

Version : DEMO

1.Refer to the exhibit.

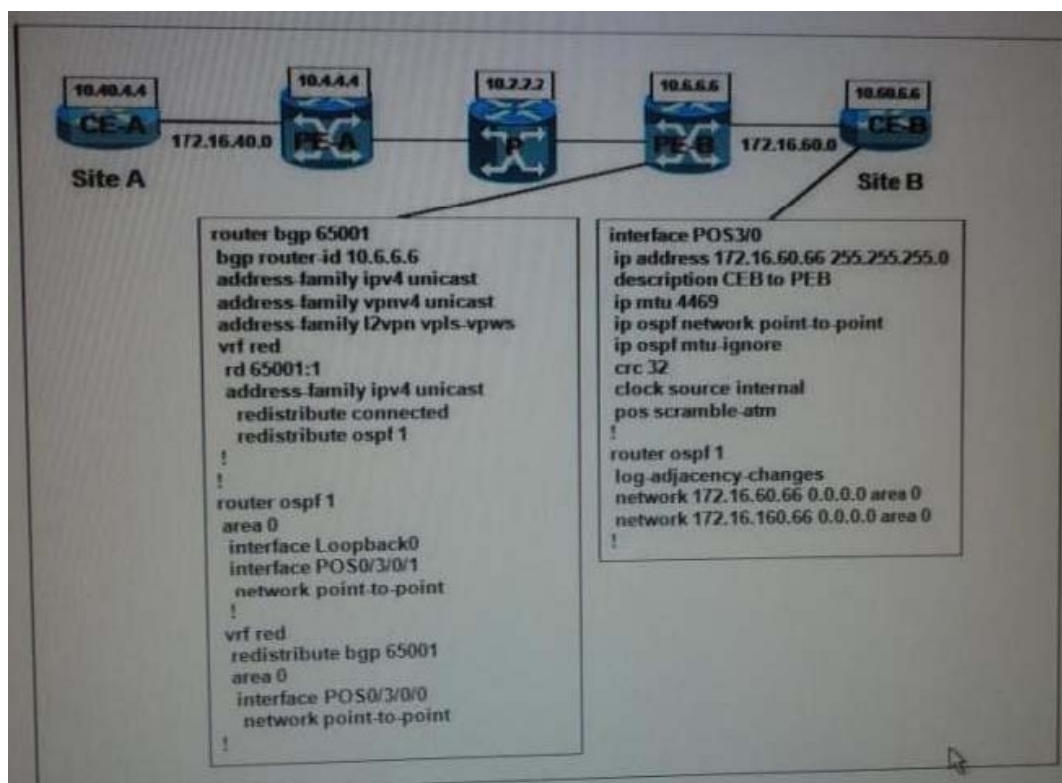

The customer has an MPLS Layer 3 VPN service CE-A is not able to ping the CE-B loopback address 10.60.6.6 CE-A is able to ping the CE-B network interface address 172.16.60.66. What must be added to the configuration to allow the loopback ping to work?

- A. The PE-B configuration needs a neighbor 10.60.6.6 command added
- B. The PE-B configuration needs interface loopback0 added under vrf red area 0
- C. The CE-B configuration needs to static route added for the PE-B connected interface
- D. The CE-B configuration needs network 10.60.6.6 under router ospf 1

Answer: D

2.Refer to the exhibit. What type of MPLS LAYER 3 VPN configurations is represented.?



- A. Simple two-VPN scenario
- B. Overlapping VPNs

C. Central services VPNs

D. Extranet VPNs

Answer: C

3. In a service provider layer 3 MPLS VPN implementations, what is the minimum number of routing on the PE routers?

A. Three

B. Four

C. Five

D. Six

Answer: A

4. Refer to the exhibit.

```
RP/0/RSP1/CPU0:VKG-3#ping 10.11.11.11
Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 10.11.11.11, timeout is 2 seconds:
!!!!
Success rate is 100 percent (5/5), round-trip min/avg/max = 2/2/2 ms

RP/0/RSP1/CPU0:VKG-3#ping mpls ipv4 10.11.11.11/32
Sending 5, 100-byte MPLS Echos to 10.11.11.11/32,
!!!!
Success rate is 100 percent (5/5), round-trip min/avg/max = 5/5/7 ms

RP/0/RSP1/CPU0:VKG-3#ping mpls pseudowire 10.11.11.11 100
Sending 5, 100-byte MPLS Echos to 10.11.11.11 VC: 100,
QQQQ
Success rate is 0 percent (0/5)
```

The commands on the figure were executed from a Cisco ASR 9000 series router. The remote end of ping is Cisco XR 12000 series router. Which statement is true?

A. The XR 12000 has an access list that blocks the MPLS pseudowire ping

B. The interface connected to the XR 12000 is not running LDP

C. These results will occur during convergence when MPLS LDP sync is enabled

D. The MPLS pseudowire ping was not sent

Answer: D

5. Refer to the exhibit.

